



**MANUFACTURED
HOUSING**



Coaxial Direct-Vent Gas Water Heaters

1-Year Tank Warranty • 1-Year Parts Warranty



Complies with HUD Standards for Manufactured Housing Installation. Design-Certified by CSA International –

Also complies with National Appliance Energy Conservation Act (NAECA) energy-efficiency standards effective January 20, 2004.

Dual-Channel Coaxial Direct-Vent System Requires No Lower Air Intake – Draws all combustion make-up air through outer channel of roof stack from outside the structure, vents flue exhaust through inner channel.

Zero Clearance to Combustible Surfaces

Approved Roof Jack Kits Required for Installation – Four kits available to accommodate vertical vent distances from 32" to 144" (see back of sheet).

Gas Control Is Convertible for Natural and Propane Gas –

For flexibility to meet the varying needs of Manufactured Housing installations.

Top Mounted 3/4" Hot & Cold Water Inlet and Outlet

Green Choice™ Eco-Friendly Gas Burner – Patented design reduces NOx emissions by up to 33% and complies with Southern California and Texas requirements.

Glass-Lined Tank – For long-lasting protection against rust and corrosion.

Anode Rod – Helps protect against rust and corrosion for long life.

Factory-Installed Temperature & Pressure (T&P) Relief Valve

Maximum Hydrostatic Working Pressure 150 PSI

NORDYNE™

8000 Phoenix Parkway
P.O. Box 8809
O'Fallon, MO 63366



MANUFACTURED HOUSING



Coaxial Direct-Vent Gas Water Heaters

1-Year Tank Warranty • 1-Year Parts Warranty



MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GAL. CAP.	BTU INPUT PER HOUR NATURAL/PROPANE	RECOVERY 90°F RISE GALLONS	R VALUE	DIMENSIONS IN INCHES				APPROX. SHIPPING WEIGHT (LBS.)
							TANK HEIGHT	TANK DIAMETER	FLOOR TO GAS VALVE	FLOOR TO T&P VALVE	
IN1 40 NOMDS	64	0.59	40	32,000	32	12	48-3/4	21	15	42	181
IN1 50 NOMDS	74	0.58	50	34,000	34	12	57-1/2	21	15	50-1/2	209

Recoveries are rounded to nearest gallon.

Approved Roof Jack Kits

Coaxial Direct-Vent Manufactured Housing water heaters must be installed using one of these approved Roof Jack Kits, which must be ordered separately. "Min." and "Max." dimensions indicate kit adjustability for varying vent distances, as shown in drawing.

KIT NUMBER	PART NUMBER	MIN.	MAX.	SHIP. WEIGHT
CV 5	9003065	32"	60"	10 lbs.
CV 7	9003064	38"	80"	13 lbs.
CV 9	9003063	46"	108"	27 lbs.
CV 12	9003062	56"	144"	22 lbs.

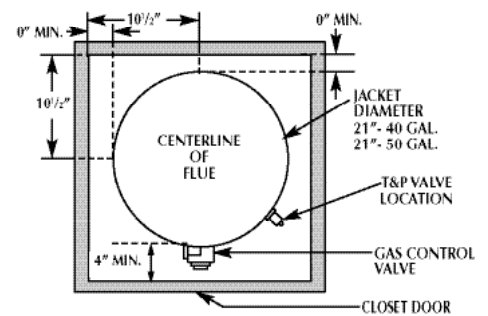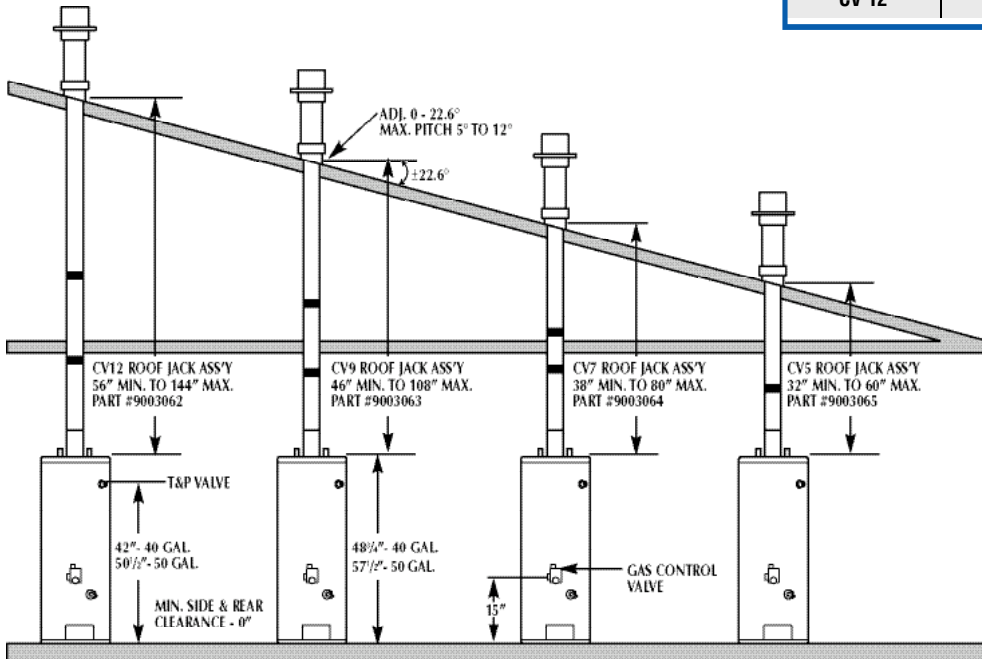

NORDYNE™

8000 Phoenix Parkway
P.O. Box 8809
O'Fallon, MO 63366